


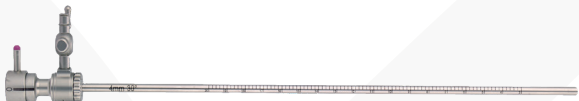




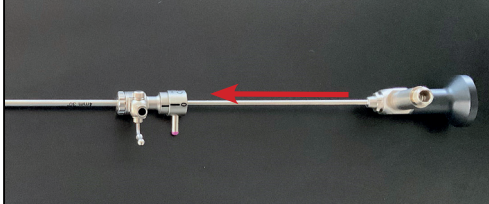
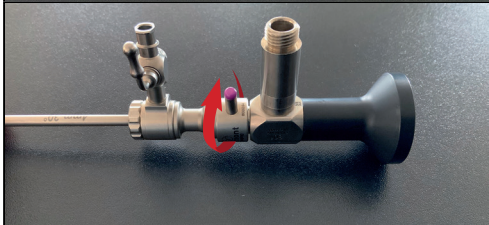
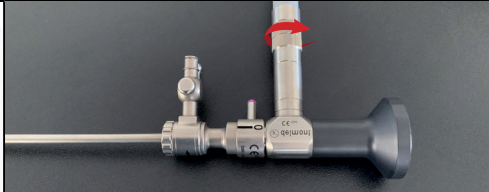
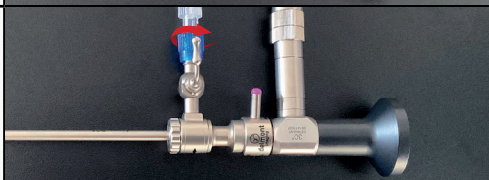

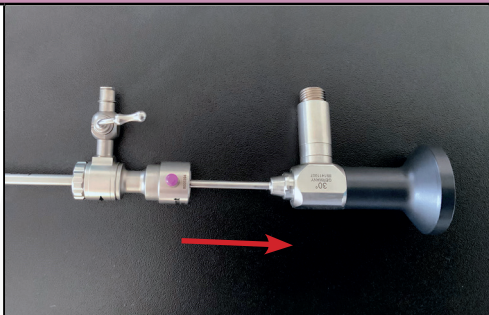



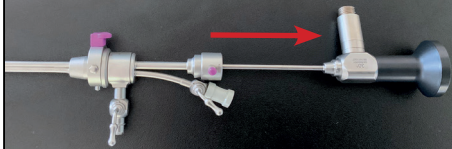

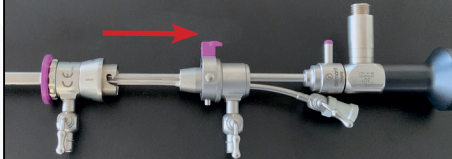

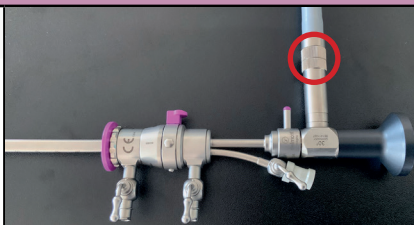
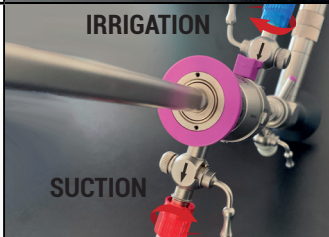

EasyCare Quick-start

Set elements	
	Hysteroscope 2,9 mm
	Inner operating sheath 4,9 mm
	Outer operating sheath 5,5 mm
	Diagnostic sheath 4mm
	Cold instruments 7Fr. (scissors, biopsy forceps, alligator forceps, grasping forceps)
	
	
	
Other products required for operation	
Light cable	
Endoscopy camera	
Suction tube	
Irrigation tube	

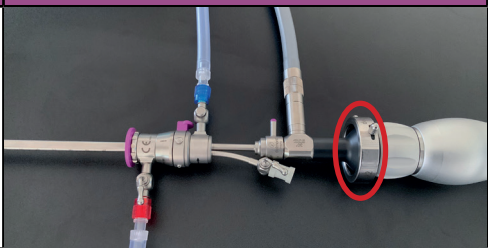
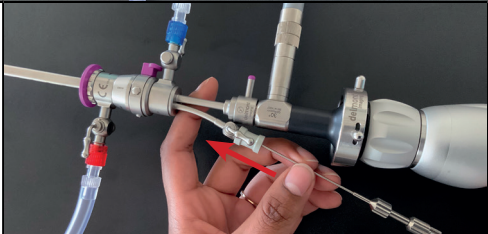

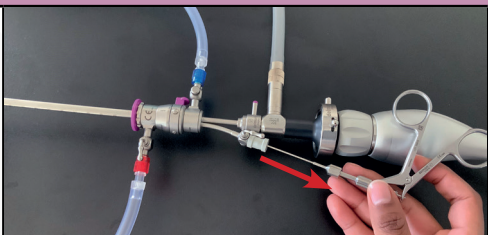

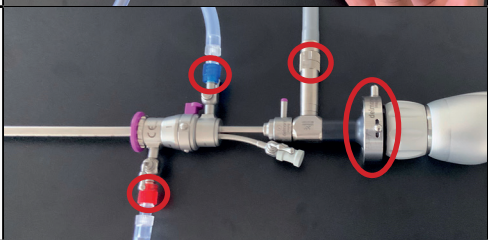


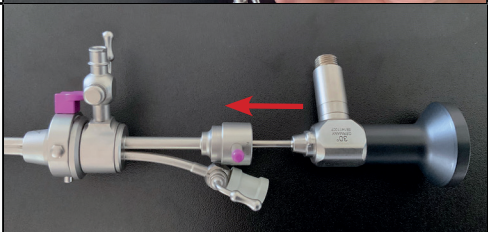

Diagnostic hysteroscopy

Step	Photo	Description
Assembly		
1		Insert the hysteroscope into the diagnostic sheath.
		<ul style="list-style-type: none"> To connect the hysteroscope and the diagnostic sheath, the locking lever must be turned so that the «0» is opposite the hysteroscope light cable connector. Turn the lever to complete the assembly.
Connections of complementary products to EasyCare		
1		Connect the light cable. <ul style="list-style-type: none"> Screw the cable to the dedicated connector on the hysteroscope.
2		Connect the irrigation tube. <ul style="list-style-type: none"> To activate the flow, open the stopcock.
3		Connect the endoscopy camera to the hysteroscope.
Disassembly		
1		Disconnect the complementary products.
		Remove the hysteroscope. <ul style="list-style-type: none"> Turn the locking lever so that the hysteroscope can be removed. <div>  <p>Slide the hysteroscope straight out until it is completely withdrawn, so as not to damage the products.</p> </div>

Operative hysteroscopy

Step	Photo	Description
Assembly		
1		Insert the hysteroscope into the inner sheath.
		<ul style="list-style-type: none"> To connect the hysteroscope and the inner sheath, the locking lever must be turned so that the «0» is opposite the hysteroscope light cable connector. Turn the lever to complete the assembly.
2		Insert the outer sheath (if needed). <ul style="list-style-type: none"> Insert all the components already assembled into the outer sheath.
		<ul style="list-style-type: none"> Arrows are present on the inner and outer sheath. They must be aligned. To complete the assembly, push the outer sheath into the inner sheath. You should hear a locking «click».
Connections of complementary products to EasyCare		
1		Connect the light cable. <ul style="list-style-type: none"> Screw the cable to the dedicated connector on the hysteroscope.
2		Connect the irrigation and suction tubes. <ul style="list-style-type: none"> Arrows are present on both stopcocks to indicate the direction of flow. <p> Be sure to connect the irrigation and suction tubes to the corresponding stopcocks.</p>

Operative hysteroscopy

Step	Photo	Description
3		Connect the endoscopy camera to the hysteroscope.
4		Insert the instrument of your choice. <ul style="list-style-type: none"> Slide the instrument through the sealing cap, keeping the instrument's jaws closed. <p> If resistance occurs, readjust the position.</p>
Disassembly		
1		Remove the instrument. <p> The instrument should be removed carefully and not bent to avoid damage.</p>
2		Disconnect complementary products.
3		Remove the outer sheath. <ul style="list-style-type: none"> Press the quick-lock button to unlock the outer sheath. <p> Slide the outer sheath straight out until it is completely withdrawn, so as not to damage the products..</p>
4		Remove the hysteroscope. <ul style="list-style-type: none"> Turn the locking lever so that the hysteroscope can be removed. <p> Slide the hysteroscope straight out until it is completely withdrawn, so as not to damage the products..</p>